

# Carriers

# DUCATI

MOTORCYCLES & SCOOTERS








# 3R

# fattorino

for your light duties  
 for your quick deliveries  
 to your customers  
 for your errands  
 for your gifts

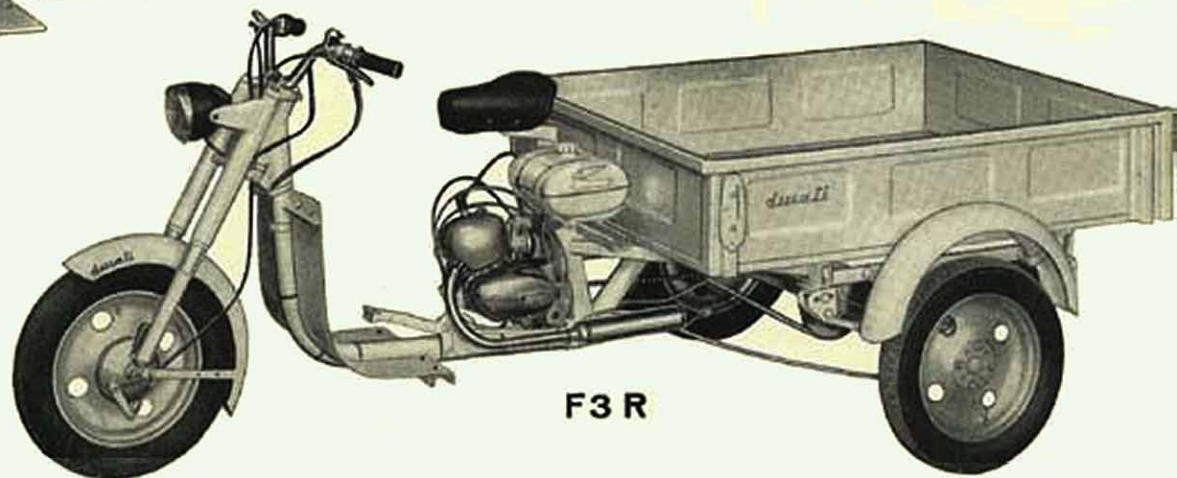

F3 R

#### VARIOUS MODELS

On application the following models can be supplied :

- a) with iron sheet platform, normal type
- b) with iron sheet platform, long type
- c) with wooden platform
- d) with iron sheet closed van
- e) all the models with, or without driver's cabin

#### MAIN FEATURES

48 c.c. - 2 stroke

Timing by crossed lights

Three speed gear box

Lever starter


#### PERFORMANCES

Transportable charge kg. 200 (lbs. 440.920)

Maximum speed km/h. 35 (M.P.H. 22)

Fuel consumption per 100 kms. (62 miles) (accord. CUNA direct.) lt. 2.5 (imp. gal. 0.5499 U.S. gal. 0.6604)

Maximum gradient which can be overcome with full charge 12%

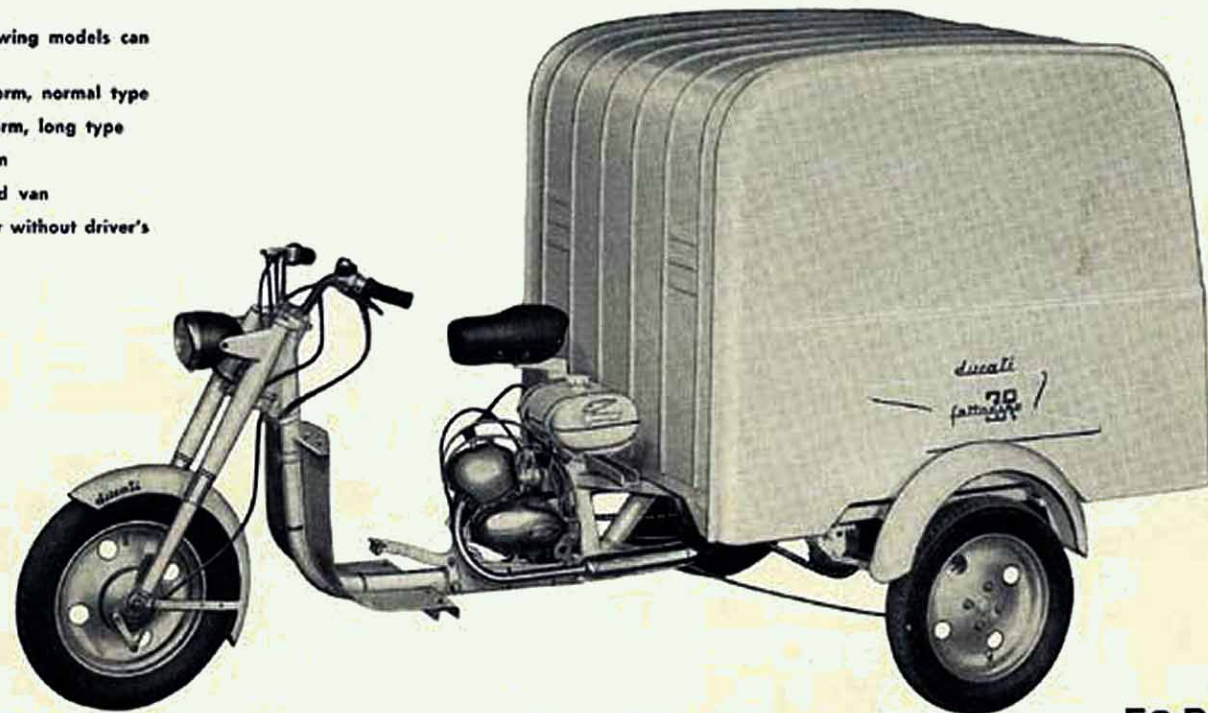

F3 RG

The above mentioned data are not binding, but informative.




Produced by:

# DUCATI MECCANICA S.p.A.


MOTORCYCLES & SCOOTERS DIVISION

BOLOGNA (Italy) - P. O. Box. 313 - Tel. 49.16.01-2-3-4


These are the most  
economical carriers

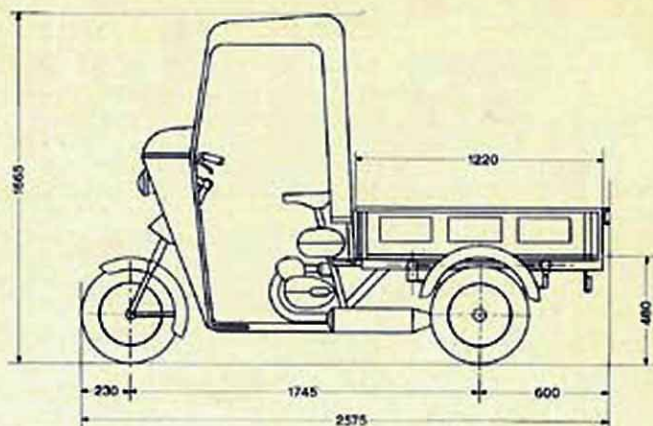

NORMAL PRESSED STEEL PLATFORM - Inner sizes: mm. 1180 x 950 x 250  
(ft. 3.8713 x 3.1168 x 0.8202)

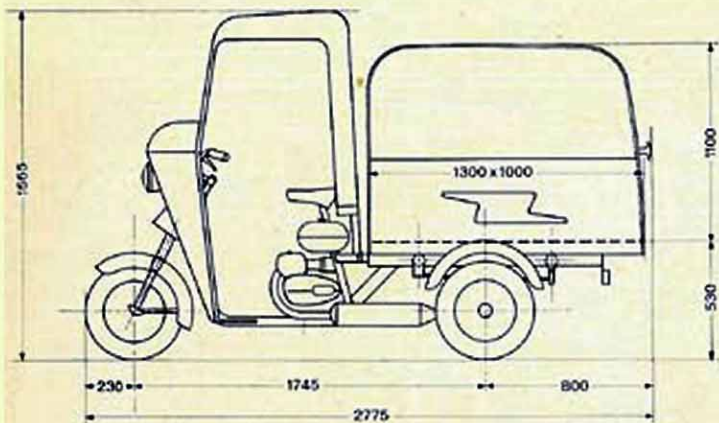

PRESSED STEEL CLOSED VAN "GIARDINETTA" - Opening of the rear little doors:  
mm. 810 x 810 (ft. 2.6575 x 2.6575)

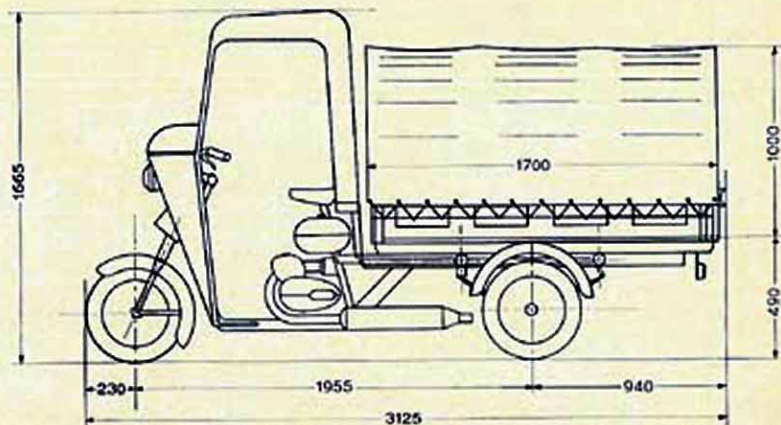

PRESSED STEEL LONG PLATFORM WITH CENTERINGS AND COVER

# IceniCAM Information Service



[www.icenicam.org.uk](http://www.icenicam.org.uk)