


Sketch by Edward Lambah-Stoate

QYS Decompressor

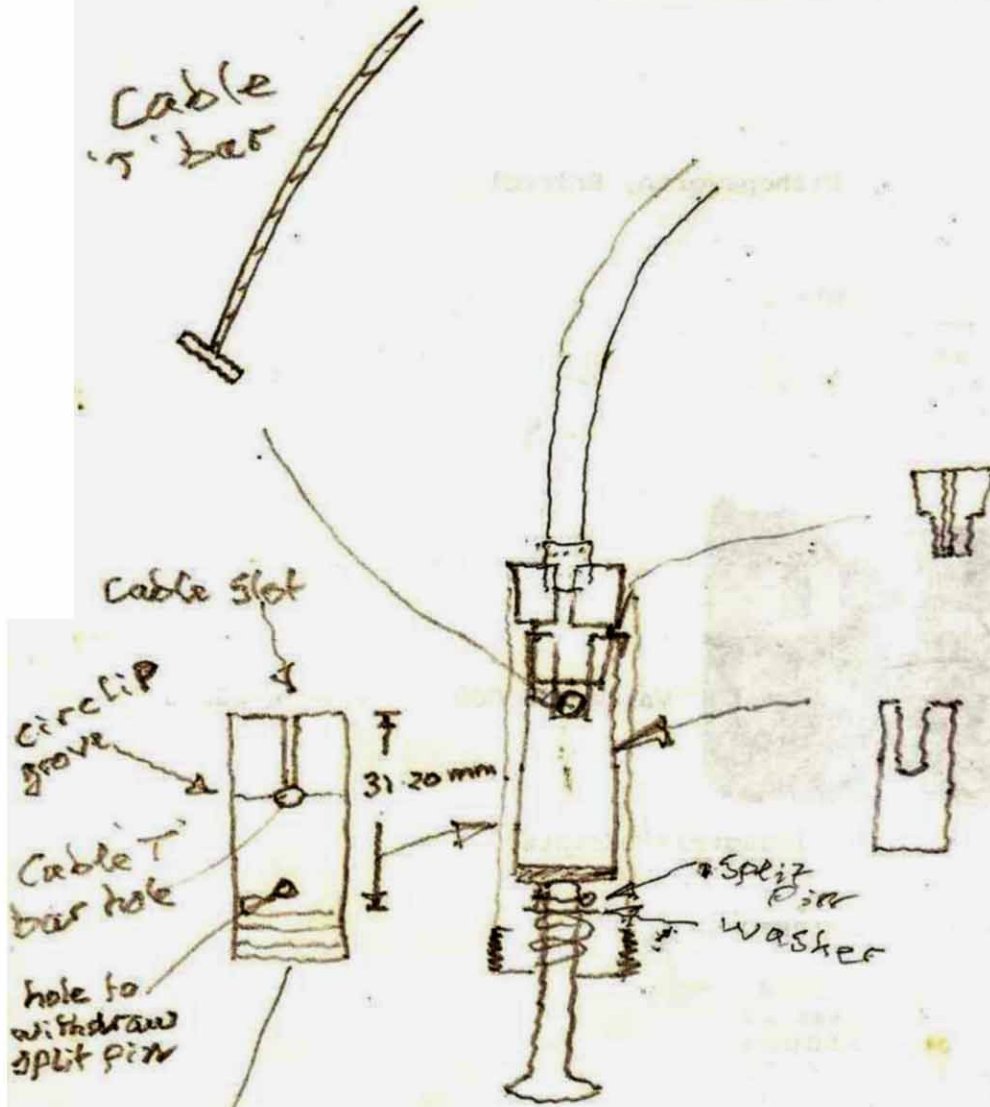

Collar with
 Cable Slot,
 Drilled to
 receive Cable
 Sleeve at top
 end.

Valve lifter
 Solid at lower
 end. Slotted
 to accept
 Cable 'S' bar
 and Cable.

Cable 'S' bar
 Cable slot
 circled groove
 Cable 'S' bar hole
 hole to withdraw split pin

split pin
 washer

31.20 mm

brass housing
 Threaded into
 Cylinder head

Dimensions

- Brass housing,
 int. dia. 11.00 mm
 ext dia. 14.25 mm
- Valve lifter
 ext. dia. 10.00 mm
 Below slot 4.50 mm
 above slot 7.00 mm