


moped JAWA 210

MOTOKOV



moped JAWA 210

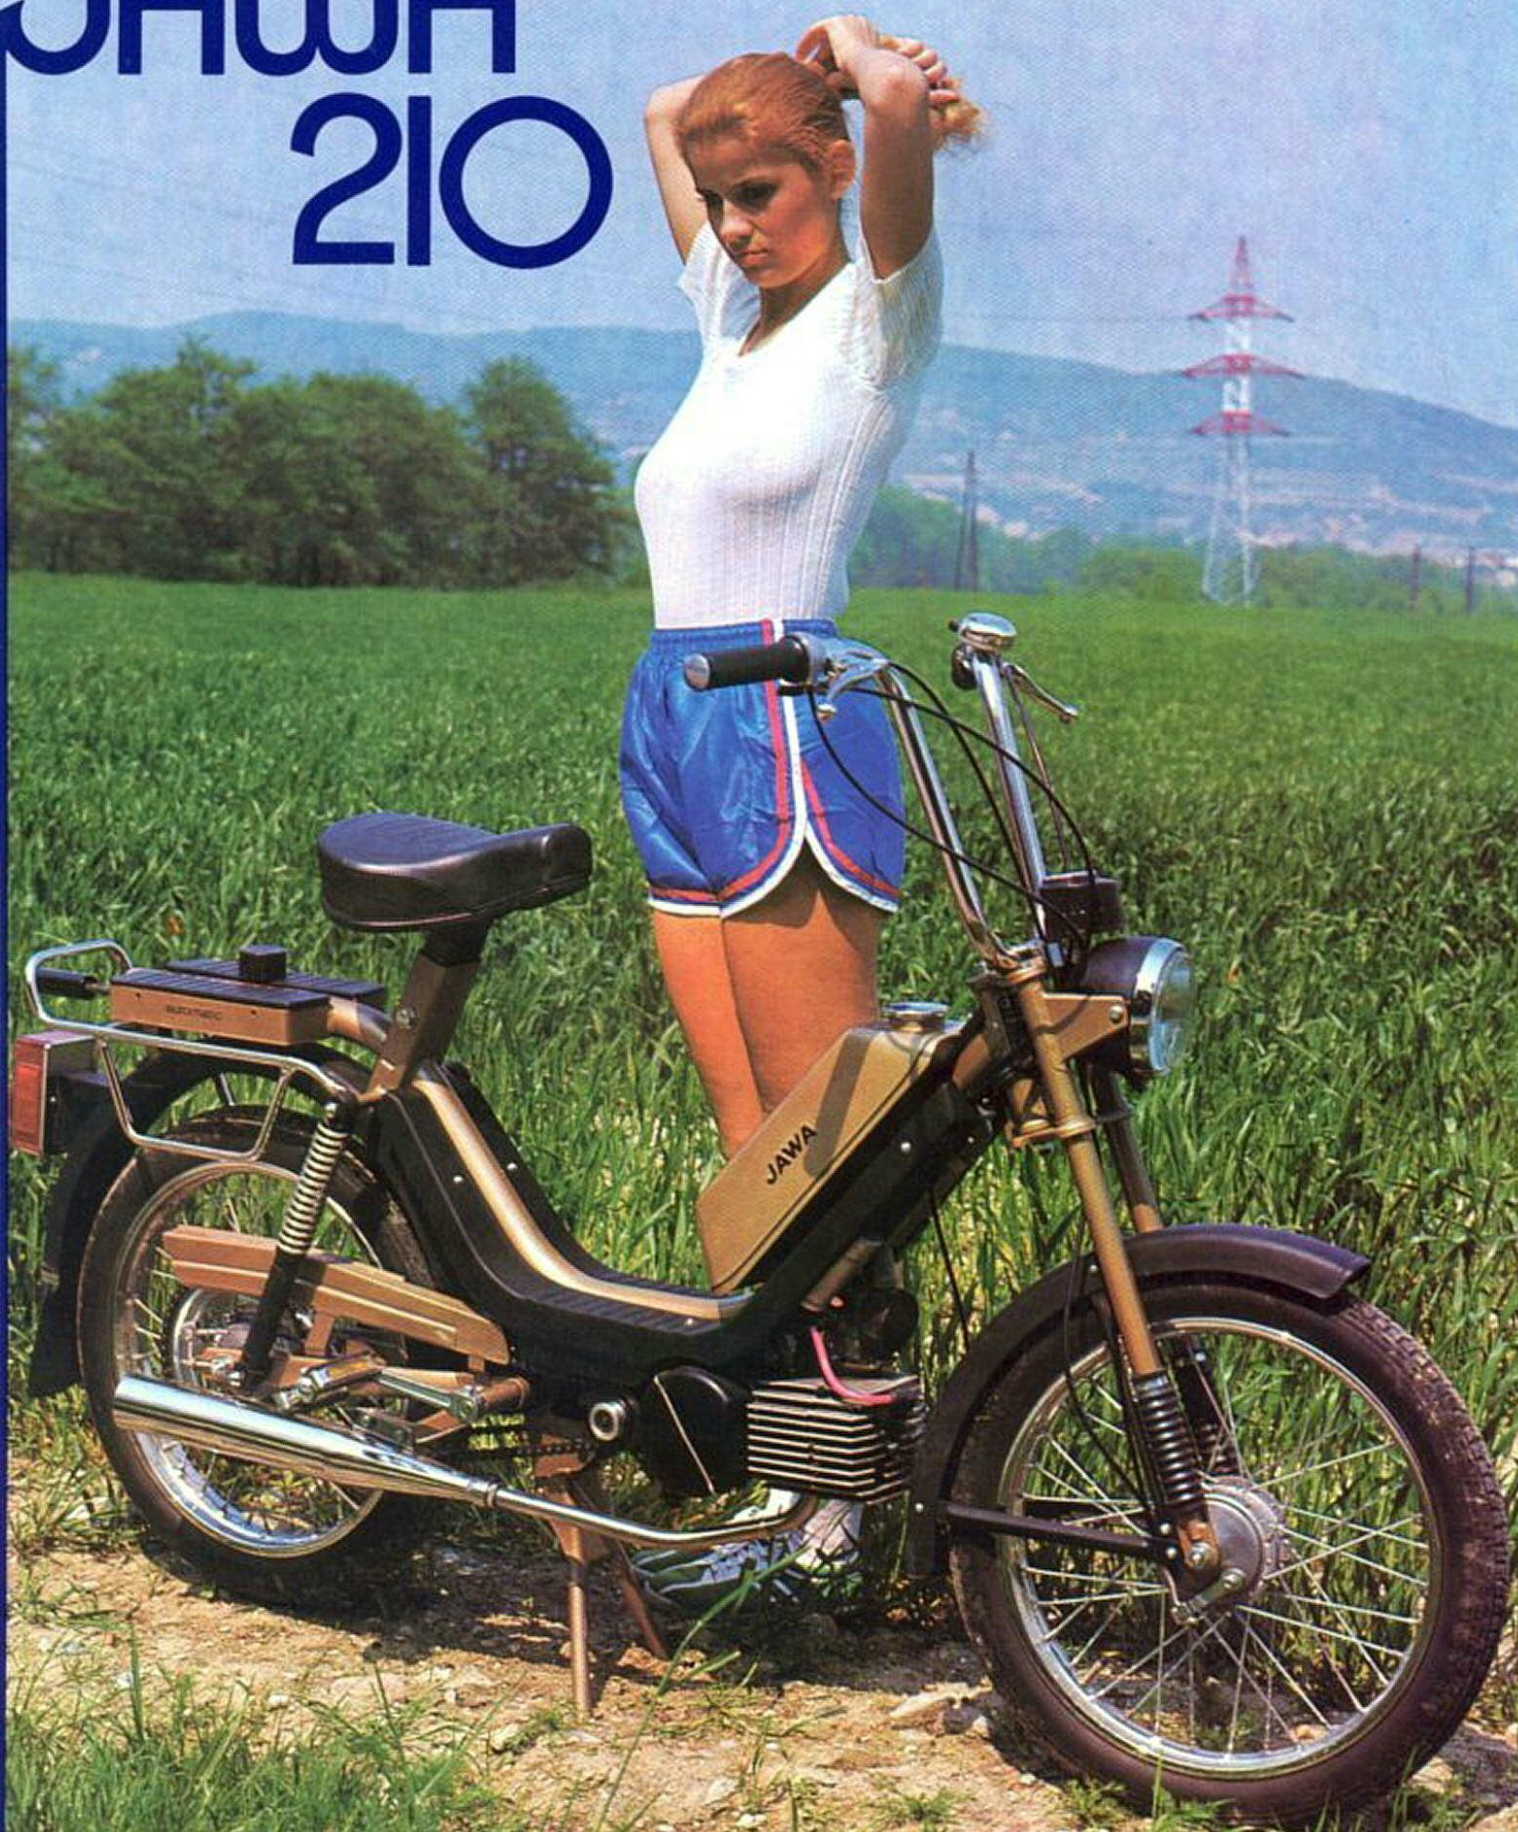


Exporter
MOTOKOV
Praha
Czechoslovakia

JAWA 210 MOPED

Engine	Air cooled, two-stroke, single cylinder	Frame	tubular, open
Swept volume	49 c. c.	Suspension — front	telescopic fork, 60 mm stroke
Bore/stroke	39/41 mm	— rear	swinging fork, 60 mm stroke
Compression ratio	1 : 9	Brake — front and rear	internal-expanding shoe brake, dia. 85×20 mm
Maximum output	1.75 kW (2.38 h. p.) at 5,000 r. p. m.		1,770±15 mm
	3.85 Nm (0.4 kpm) at 3,250 r. p. m.	Moped length	1,050±10 mm
Maximum torque	JIKOV 2912 DC	Moped height	700±5 mm
	1 : 33	Moped width	755 to 830 mm
Carburettor	6 V, thyristorized, contactless	Height of saddle	115±10 mm
Oil/petrol mixing ratio	PAL N 7 R	Ground clearance	1,150±20 mm
Ignition	6 V/15 W	Wheel base	51 kg
Spark plug	6 V/5 W	Dry weight	54 kg
Headlamp	dry, automatic	Kerb weight	80 kg
Tail lamp	two-speed, automatically operated	Loading capacity	3.8 litres
Clutch		Fuel tank filling capacity	
Gearbox			

IceniCAM Information Service

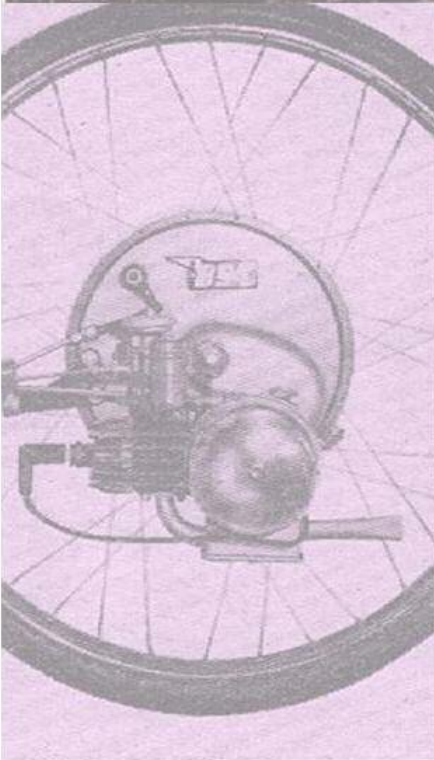

www.icenicam.org.uk